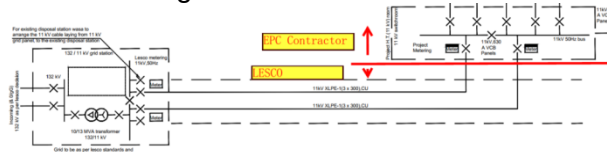


Sr #	Reference Section	Description	Employer's Response
		lists, Single Line Diagrams (SLDs) for MV pumps at each station, and all relevant interface details. 2) Apart from the MV motors, please clarify whether any existing facilities at the 23 lift stations require power supply from the relocated panel room (substation). If the design, procurement, and installation of power cables and distribution feeders fall within the Contractor's scope, please provide the corresponding load information, SLDs, and interface details for each station.	2) The EPC contractor is at liberty to visit the relevant site and estimate the relocation and reconstruction scope of work, as per its own design and layout, however, the equipment list of 23 pumping stations is attached as Annex-C for reference only. Since the relocation shall be planned within the existing premises, the same power supply source may be utilized for the re-located facility. It may be noted that due to space constraint in some of the disposal stations, the re-location job may also involve shifting of main supply source like transformer / generator, which may also involve MV cable,
4.	Page 6-20 of Volume 2 Part II, Section 6, Employer's Requirements Item 4 of Provisional Sums page 4-75 of Volume 1, Part I, Section 4, Tender Forms Schedule No. 5: Electrical Work, ULTIMATE DISPOSAL STATION AT GULSHAN E RAVI	Page 6-20 of V2 - Part II – Employer's Requirements. C. Electrical, Instrumentation & Control (EI&C) Design Assistance in Design of Grid Station with LESCO: Design of electricity 132 kVA grid station near ultimate pumping station and coordinate with LESCO. As per Schedule No. 5: Electrical Works (5.19–5.49) of V1 – Part I – Tender Procedures, the scope of the 132 kV GIS, 132/11 kV power transformer, and associated equipment installed at the 132 kV station has not been specified. The Tenderer understands that the 132/11 kV grid station is outside the Contractor's scope and that the battery limit terminates at the incoming switchgear of the 11 kV switch room, as shown in the Ultimate Disposal Station SLD. Kindly confirm this understanding. 	Refer to Section 4, Tender Forms, Provisional Sums and Schedule No. 5: Electrical Work, Ultimate Disposal Station at Gulshan e Ravi, it is clarified that the grid station is also within the EPC Contractor scope, however, the detailed design of the grid station shall be prepared in accordance with the LESCO / WAPDA specifications and the EPC Contractor will coordinate with them for the installation of the grid station and its connection with the proposed pumping station at Gulshan e Ravi. The battery limit of the pumping station includes the grid station as provided in the provisional sums.
5.	Volume 1, Part I, Section	(23 Nos. Intake Structures for 23 Screen Systems &	The list of 14 generators with their rating and capacity is